

VOR/DME or TACAN RWY 32


VORTAC TQQ 113.0 Chan 77	APCH CRS 314°	Rwy Idg THRE Arpt Elev 12,001 5550
--	-------------------------	---

AL-3188 [USAF]

TONOPAH TEST RANGE (KTNX)


V * When ALS inop, increase CAT CDE vis to 1½ miles. ** Circling NA W of Rwy 14/32	ALSF-1 	MISSED APPROACH: Climb to 11,000 via TQQ VORTAC R-325 to ROCEN and hold, continue climb in hold to 11,000.
--	------------	--

AWOS 113.0	NELLIS CONTROL 119.35 254.4	SILVERBOW TOWER 124.75 257.95 0	GND CON 127.25 335.5
----------------------	---------------------------------------	--	--------------------------------

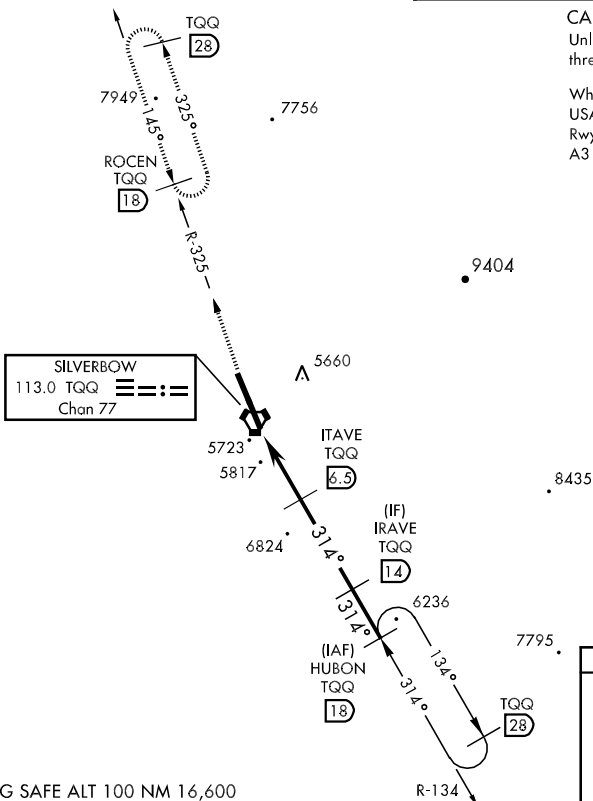


CAUTION: High terrain 3 NM W of Rwy.
 Unlit terrain 5561' MSL, 200' prior to
 threshold, 385' left of course.

When VGSI inop, procedure NA at night.
 USAF ONLY: When VGSI inop, straight-in
 Rwy 32 authorized at night with MAJCOM
 A3 approval.



EMERG SAFE ALT 100 NM 16,600

11,000 ↑ TQQ R-325	ROCEN TQQ 18	IRAVE 14	HUBON 18		
VORTAC ITQGE 1	ITAVE 6.5	8700	10,400		
0.5 NM		5.5 NM			
CATEGORY	A	B	C	D	E
S-32 *	6080-1 530 (600-1)				
C CIRCLING**	6080-1 530 (600-1)	6080-1½ 530 (600-1½)	6100-2 550 (600-2)		

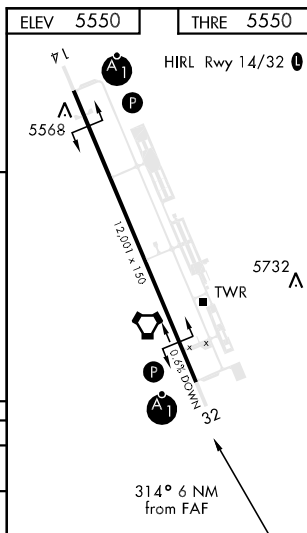

VOR/DME or TACAN RWY 32